

## REVISION

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	1	INITIAL RELEASE	02/20/2024	HBAKKE	DREBECK

F

F

E

E

D

D

C

C

B

B

## NOTES:

1. CONNECTOR TYPE: C14
2. RATING: 6A, 250VAC

## 3. FEATURES:



SNAPS INTO 1.0-3.0mm PANEL 6.3mm QUICK-CONNECT TERMINATIONS  
EMI FILTERED DOUBLE CONTACT ILLUMINATED ON/OFF SWITCH DOUBLE  
FUSEHOLDER

## 4. PACKAGING NOTE:

CONNECTOR SHALL BE INDIVIDUALLY PACKAGED, LABEL PER LSP-010-5.

## 5. ALL DIMENSIONS FOR REFERENCE ONLY

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

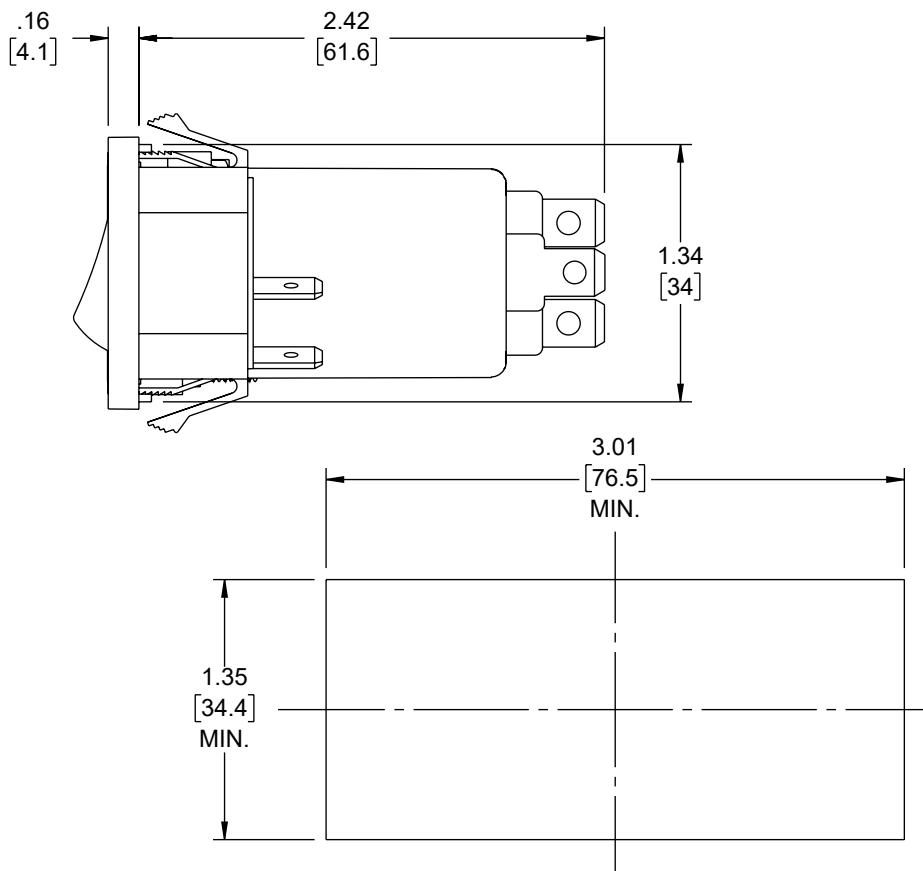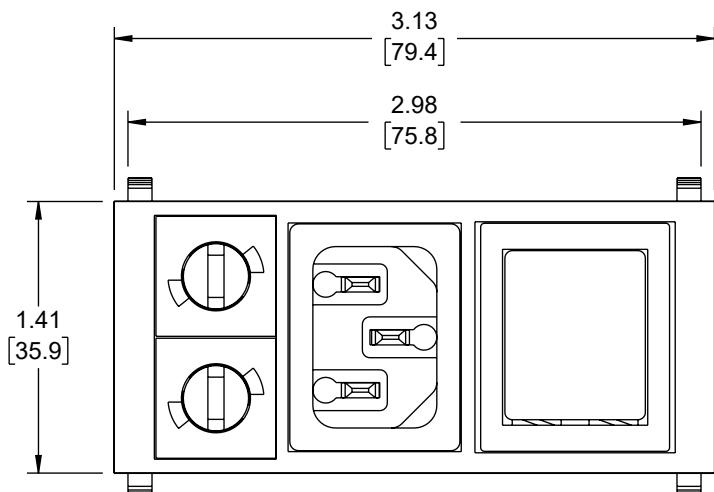

## PANEL FIXING DETAILS

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS


TOLERANCES:  
X =  $\pm .2$  [5] FRACTIONS  
XX =  $\pm .02$  [0.5]  $\pm 1/32$   
XXX =  $\pm .005$  [0.13] ANGLES  $\pm 1^\circ$

CABLE LENGTH TOLERANCES:  
>12 [305] =  $\pm 1$  [25] / -0  
>12 [305]  $\leq$  60 [1524] =  $\pm 2$  [51] / -0  
>60 [1524]  $\leq$  120 [3048] =  $\pm 4$  [102] / -0  
>120 [3048]  $\leq$  300 [7620] =  $\pm 6$  [152] / -0  
>300 [7620] =  $\pm 5\%$  / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY  
AND SUBJECT TO CHANGE WITHOUT NOTICE  
UN-DIMENSIONED/NON-CRITICAL FEATURES  
MAY VARY IN SIZE AND LOCATION  
COLORS MAY VARY



Website: [www.Transtector.com](http://www.Transtector.com)  
Phone: 1.800.882.9110 | 1.208.635.6400



INTERPRET ALL DIMENSIONS AND  
TOLERANCES PER ASME Y14.5

SCALE NONE SHEET  
1 OF 1

DESCRIPTION  
AC PEM C14 1.0mm TO 3.0mm PANEL SNAP-IN 6.3mm QUICK-CONNECT EMI FILTERED DOUBLE CONTACT ILLUMINATED SWITCH 2X FUSEHOLDERS

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	30992	HBAKKE	ACM-C4-NXQ6ER2LF2-TT	1