

DC Breaker, 1U, 15A

## DCBKR1B-15



### Features

- Branch Breakers for DCPDU1B Rack Mount DC PDUs
- Field-Configurable
- UL489 Listed

### Applications

- Telecommunications Base Stations
- Land Mobile Radio
- First Responder Sites
- Emergency Management Systems
- Industrial Automation
- Utilities

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Service Voltage	24		48	Vdc
Output Voltage		48		Vdc
Maximum Continuous Operating Voltage (MCOV)				
Line to Return			80	Vdc
Input Current			15	A

### Mechanical Specifications

Weight 0.25 lbs [113.4 g]

### Monitoring and Control

Alarm Relays 0

### Environmental Specifications

Operating Temperature -10 to +70deg C  
 Storage Temperature -40 to +85deg C

### Compliance Certifications

UL Compliant UL489  
 RoHS Compliant Yes

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:  
[DC Breaker, 1U, 15A DCBKR1B-15](#)

DC Breaker, 1U, 15A

## **DCBKR1B-15**

### **DC Circuit Breaker**

---

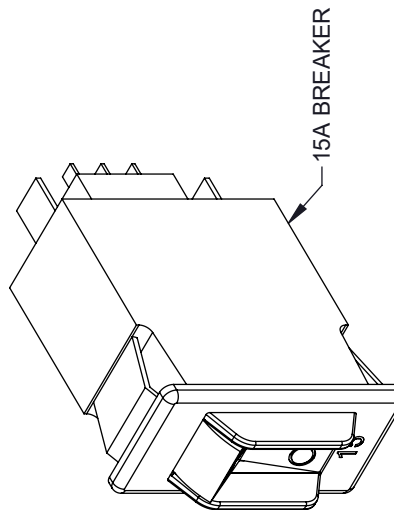
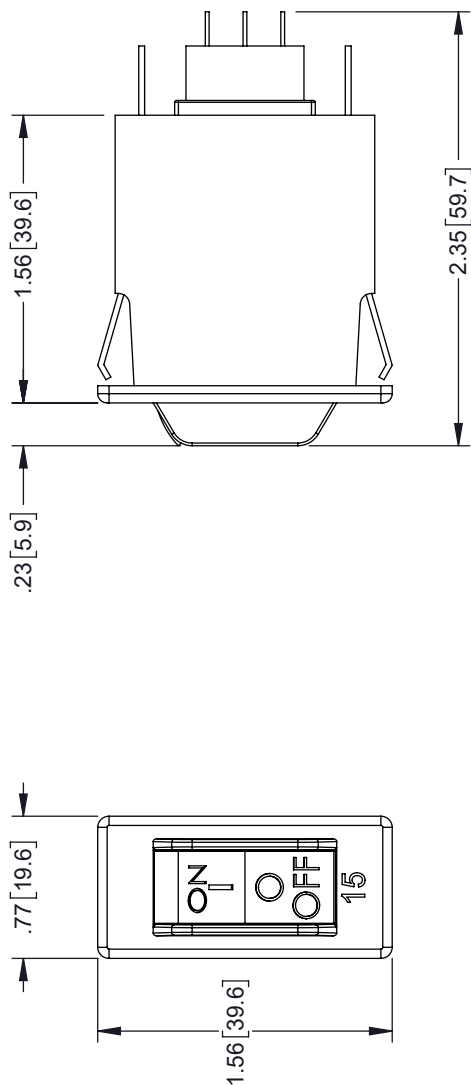
Transtector Systems specializes in protection of highly sensitive, low voltage equipment through its patented, non-degrading silicon diode technology and custom filters. Our power quality expertise translates into a diverse product offering including AC, DC, and signal applications as well as integrated cabinets, power distribution panels and EMP hardened devices.

Click the following link (or enter part number in “SEARCH” on website) to obtain additional part information including price, inventory and certifications: [DC Breaker, 1U, 15A DCBKR1B-15](#)



URL: <https://www.transtector.com/dc-circuit-breaker-rack-mount-pdu-dc-dcbkr1b-15-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Transtector reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Transtector does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Transtector does not assume any liability arising out of the use of any part or documentation.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	1/21/21	DWR



THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS</p>				<p><b>TRANSECTOR</b></p>		<p>THIRD-ANGLE PROJECTION</p> 	
<p>TOLERANCES:</p>		<p>X = ± .2 [ .008 ]      FRACTIONS XX = ± .02 [ .51 ]      + / - 32 XXX = ± .005 [ .13 ]      ANGLES ± 1°</p>		<p>THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF TRANSECTOR, INC. ALL RIGHTS RESERVED.</p>		<p>1 OF 1</p>	
<p>CABLE LENGTH [ L ] TOLERANCES:</p>		<p>L ≤ 12 [ 305 ] = +1 [ 25 ] / -0 12 [ 305 ] &lt; L ≤ 60 [ 1524 ] = +2 [ 51 ] / -0 60 [ 1524 ] &lt; L ≤ 120 [ 3048 ] = +4 [ 102 ] / -0 120 [ 3048 ] &lt; L ≤ 300 [ 7620 ] = +6 [ 152 ] / -0 300 [ 7620 ] &lt; L = +5% / -0</p>		<p>SHEET</p>		<p>SCALE</p>	
<p>ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.</p>		<p>SIZE</p>		<p>CAGE CODE</p>		<p>DRAWN BY</p>	
<p>A</p>		<p>30992</p>		<p>DPM</p>		<p>ITEM NO.</p>	
<p>10701 Airport Road, Hayden, ID 83835</p>		<p>an INFINITE® brand</p>		<p>Phone: 1.208.635.6400   1.800.982.9110</p>		<p>Fax: 1.208.955.2041</p>	
<p>Website: <a href="http://www.transector.com">www.transector.com</a></p>		<p>E-mail: <a href="mailto:sales@transector.com">sales@transector.com</a></p>		<p>DCBKR1B-15</p>		<p>REV</p>	
<p>A</p>		<p>30992</p>		<p>DPM</p>		<p>A</p>	