

LV Fuse, 63A, Fast Acting, Current Limiting, Flat Bolt Connection



FOCP-ACDC-63-FB

LV Fuse, 63A, Fast Acting, Current Limiting, Flat Bolt Connection

Features

- High Speed Fusing Characteristics
- High Current Breaking Capacity
- Good Current Limiting Performance
- Utilization Category: aR / aBat
- Flat Bolt Style Mounting
- UL 248-13 Certified

Applications

- Electric Vehicles
- AC&DC Equipment
- Energy Storage Systems
- Power Conversion Equipment Protection
- Battery Protection
- Medium Frequency Power Supply

Description

AC/DC power fuse (also known as overcurrent protector) FOC-ACDC-63-FB from Transtector is a UL248-13 tubular style device that utilizes state of the art high speed fusing technology to protect a wide range of applications from physical damage and fire via good current limiting performance and high current breaking capacity. This overcurrent protector offers a Flat Bolt style mounting type for electrical services with up to a 63 A maximum current rating. Transtector AC/DC power fuses are available in stock with same day shipping.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Rated Current (In)			63	A
Rated AC Voltage			690	Vac
Rated DC Voltage			500	Vdc
AC Breaking Capacity (I1)			100	kA
DC Breaking Capacity (I1)			50	kA

Mechanical Specifications

Size

Height	0.75 in	[19.05 mm]
Width	0.69 in	[17.53 mm]
Depth	3 in	[76.2 mm]
Weight	0.1 lbs	[45.36 g]

Environmental Specifications

Temperature Range (Operational)	-40 to +80 deg C
Temperature Range (Storage)	-40 to +80 deg C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[LV Fuse, 63A, Fast Acting, Current Limiting, Flat Bolt Connection FOC-ACDC-63-FB](#)

LV Fuse, 63A, Fast Acting, Current Limiting, Flat Bolt Connection



FOCP-ACDC-63-FB

LV Fuse, 63A, Fast Acting, Current Limiting, Flat Bolt Connection

Humidity	95% non-condensing
Altitude	2000m (derate ln linearly to 0.85 @ 5000m)

Environmental Specification Notes:
Indoor

Installation

Mount Type	Flat Bolt
------------	-----------

Compliance Certifications

UL Compliant Certifications	Yes UL 248-13
-----------------------------	------------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[LV Fuse, 63A, Fast Acting, Current Limiting, Flat Bolt Connection FOCP-ACDC-63-FB](#)

LV Fuse, 63A, Fast Acting, Current Limiting, Flat Bolt Connection




FOCP-ACDC-63-FB

LV Fuse, 63A, Fast Acting, Current Limiting, Flat Bolt Connection

Typical Performance Data

Time-Current Characteristics (reference only)

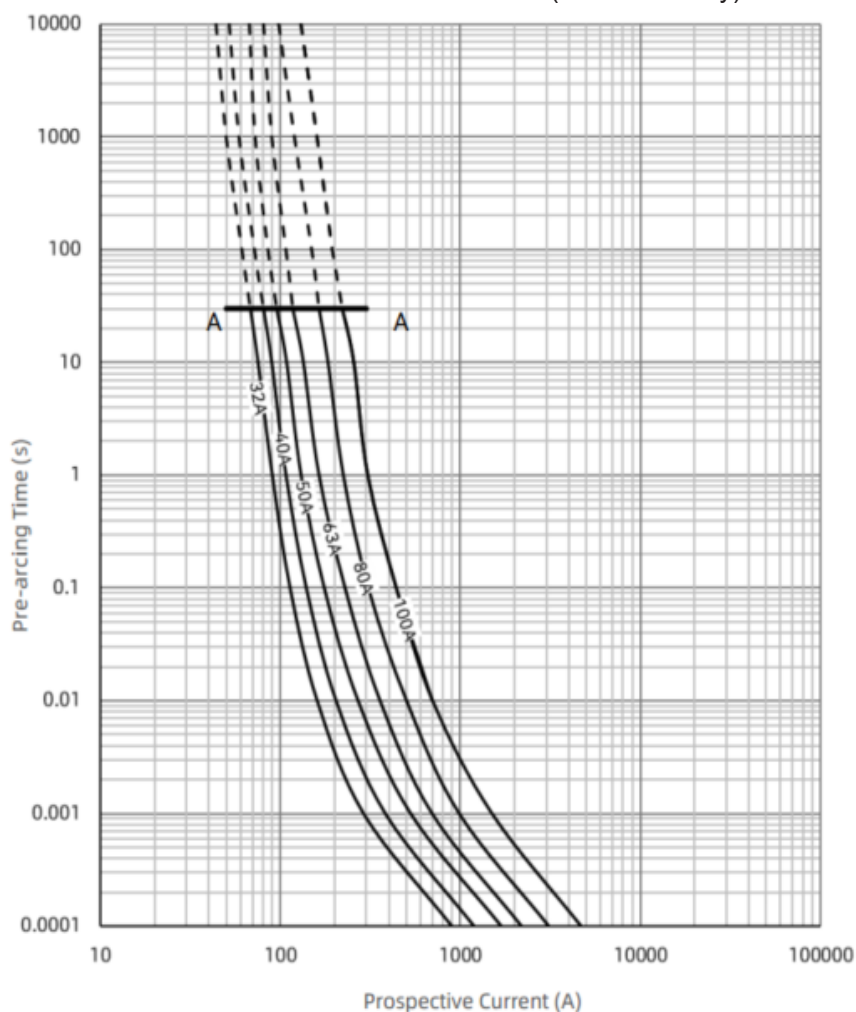

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[LV Fuse, 63A, Fast Acting, Current Limiting, Flat Bolt Connection FOCP-ACDC-63-FB](#)


LV Fuse, 63A, Fast Acting, Current Limiting, Flat Bolt Connection



FOCP-ACDC-63-FB

LV Fuse, 63A, Fast Acting, Current Limiting, Flat Bolt Connection

Power Dissipation Curve

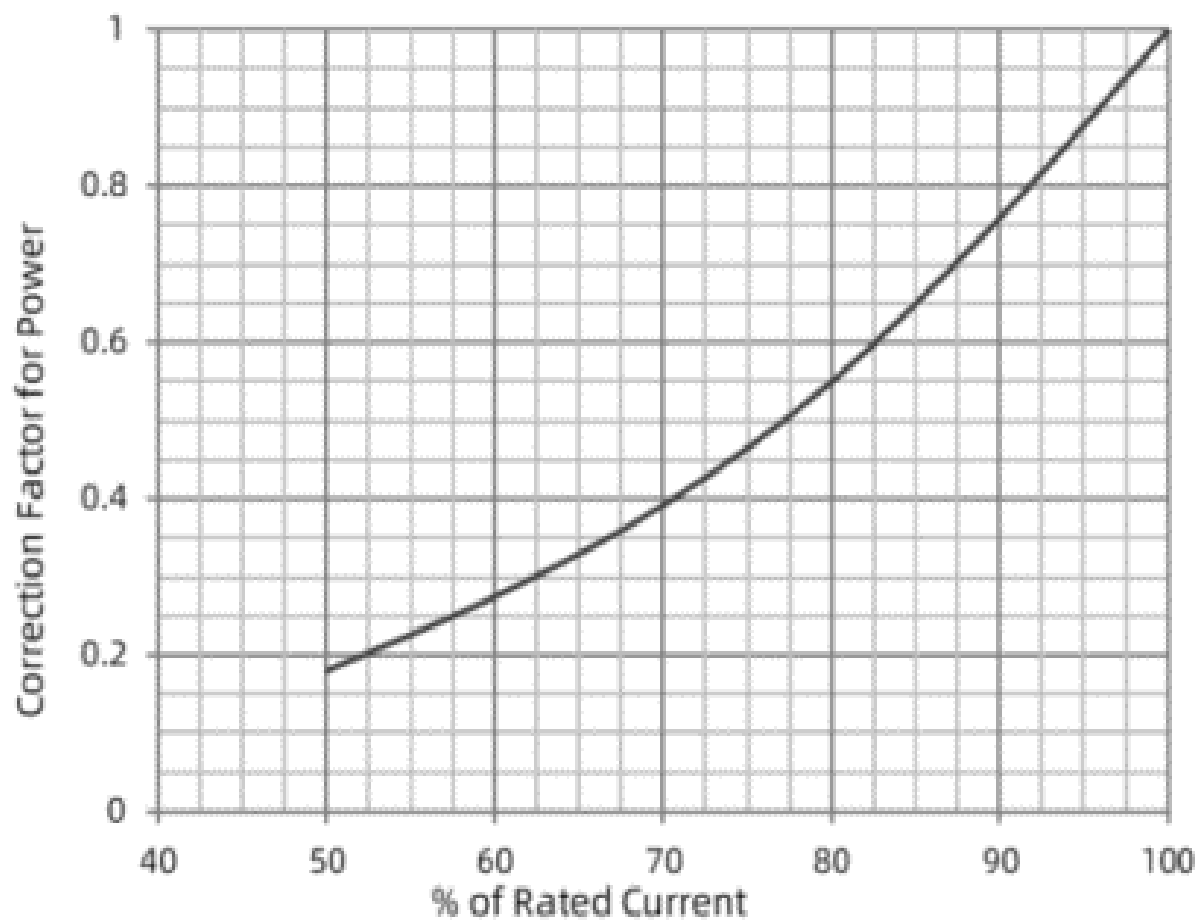

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[LV Fuse, 63A, Fast Acting, Current Limiting, Flat Bolt Connection FOCP-ACDC-63-FB](#)


LV Fuse, 63A, Fast Acting, Current Limiting, Flat Bolt Connection



FOCP-ACDC-63-FB

LV Fuse, 63A, Fast Acting, Current Limiting, Flat Bolt Connection

Peak Let-Through Current Curve

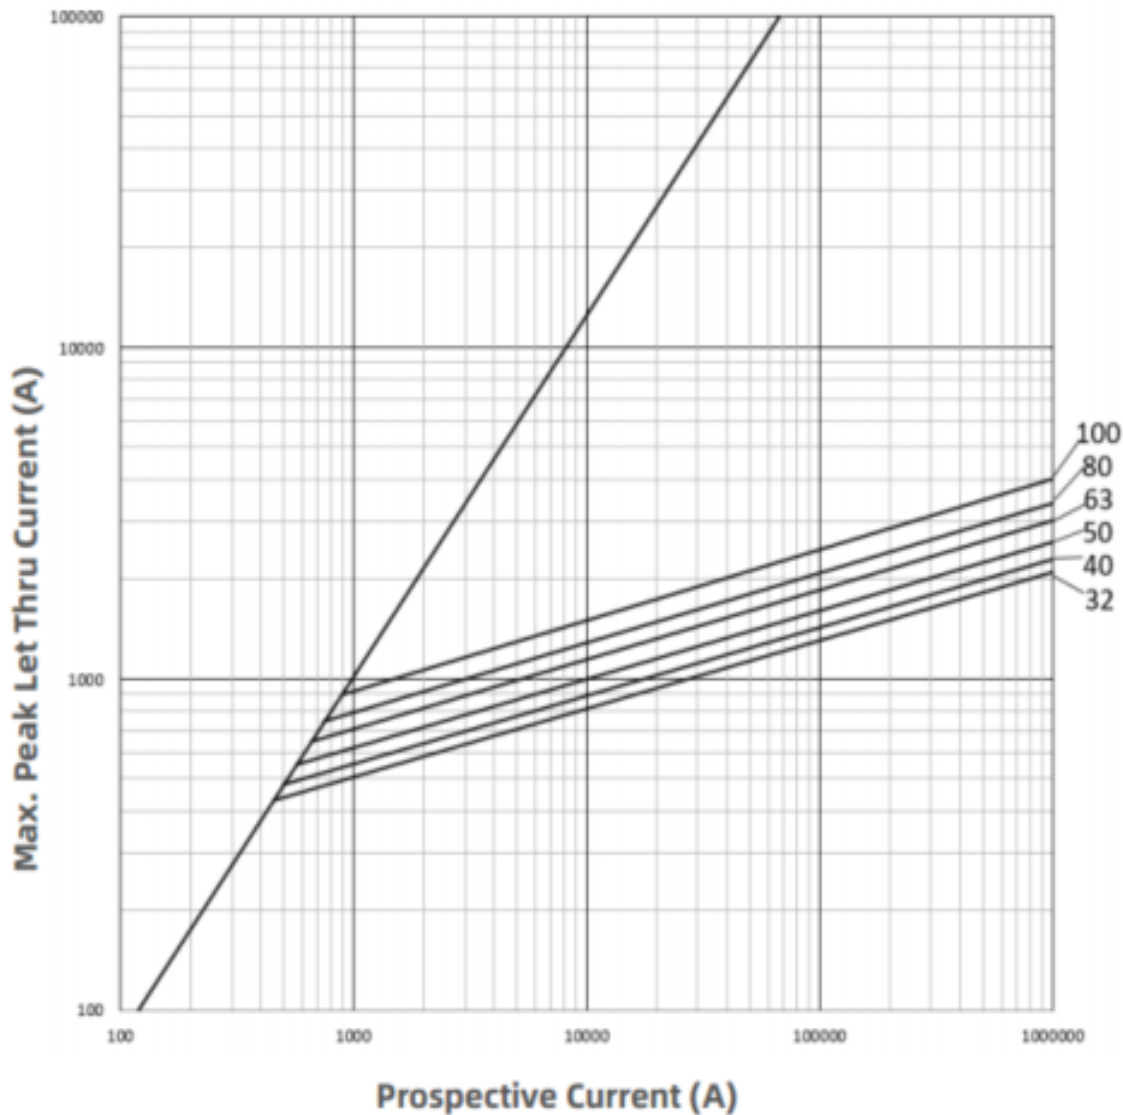

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[LV Fuse, 63A, Fast Acting, Current Limiting, Flat Bolt Connection FOC-ACDC-63-FB](#)


LV Fuse, 63A, Fast Acting, Current Limiting, Flat Bolt Connection



FOCP-ACDC-63-FB

LV Fuse, 63A, Fast Acting, Current Limiting, Flat Bolt Connection

Ambient Temperature Current Derating Curve

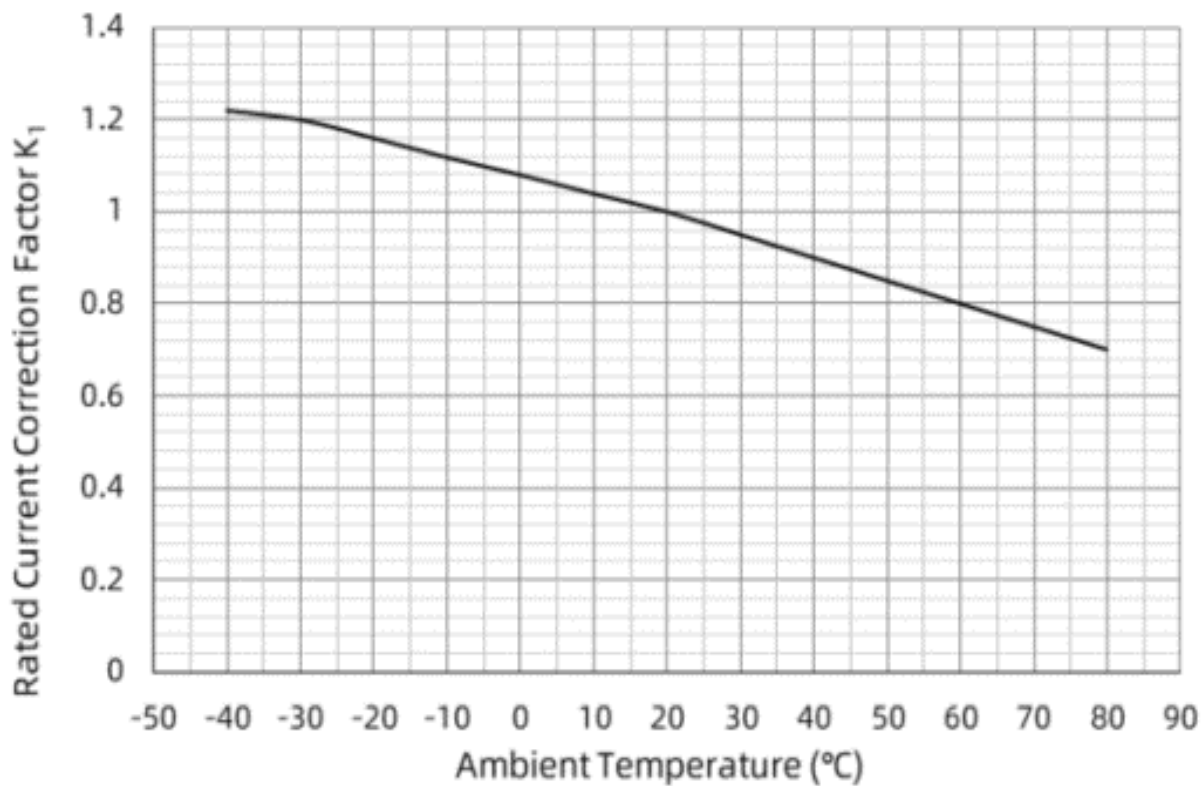

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[LV Fuse, 63A, Fast Acting, Current Limiting, Flat Bolt Connection FOC-ACDC-63-FB](#)

LV Fuse, 63A, Fast Acting, Current Limiting, Flat Bolt Connection



FOCP-ACDC-63-FB

LV Fuse, 63A, Fast Acting, Current Limiting, Flat Bolt Connection

Transtector Systems specializes in protection of highly sensitive, low voltage equipment through its patented, non-degrading silicon diode technology and custom filters. Our power quality expertise translates into a diverse product offering including AC, DC, and signal applications as well as integrated cabinets, power distribution panels and EMP hardened devices.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [LV Fuse, 63A, Fast Acting, Current Limiting, Flat Bolt Connection FOCF-ACDC-63-FB](#)


URL: <https://www.transtector.com/focp-acdc-63-fb-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Transtector reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Transtector does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Transtector does not assume any liability arising out of the use of any part or documentation.

LV Fuse, 63A, Fast Acting, Current Limiting, Flat Bolt Connection



FOCP-ACDC-63-FB CAD Drawing

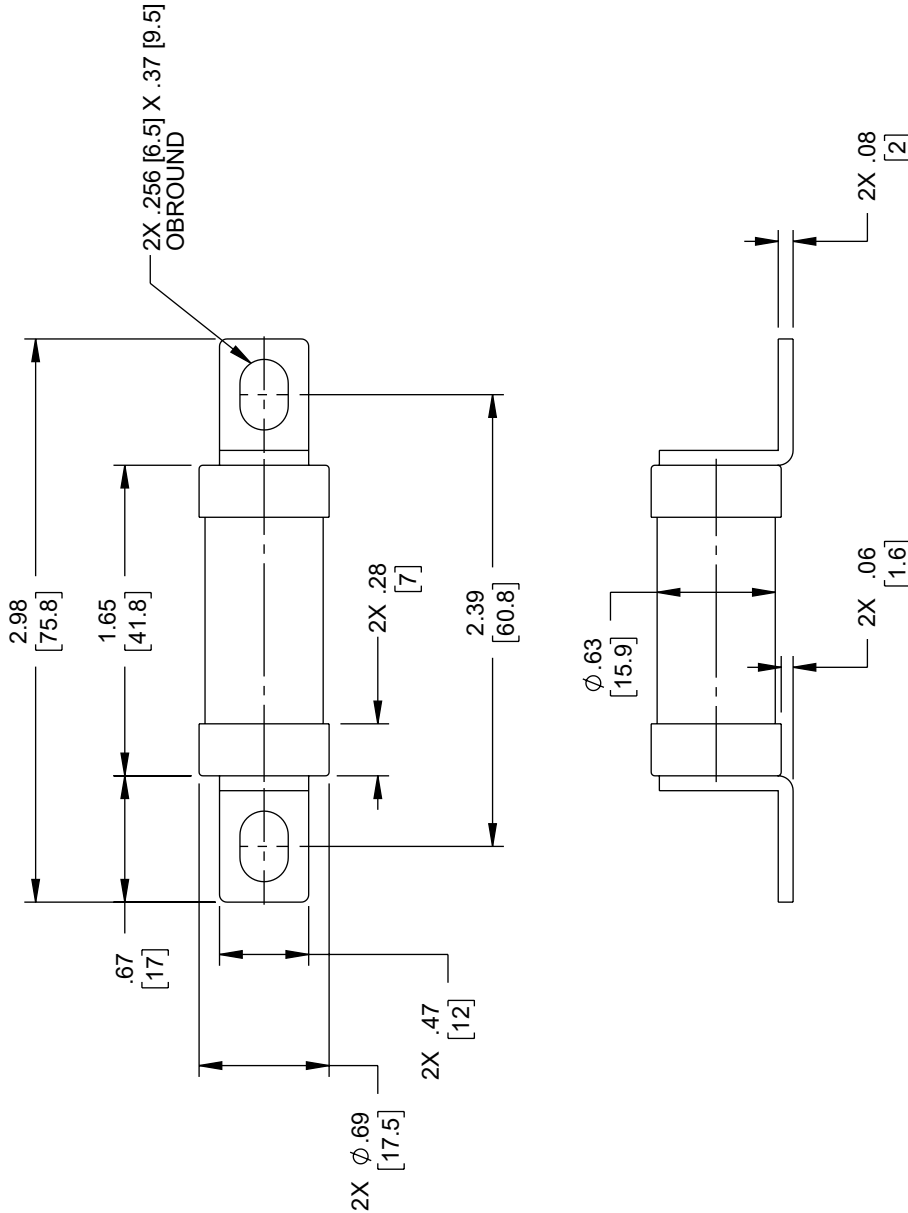ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	10/12/2023	AKRESOWSKI	DREBECK



NOTES:

1. EACH FUSE SHALL BE INDIVIDUALLY PACKAGED.

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES DIMENSIONS IN [] ARE MILLIMETERS				TRANSECTOR®				INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
TOLERANCES:		FRACTIONS		an INFINIT@ brand		SHEET		1 OF 1	
X = ±.2 [5] XX = ±.02 [0.5] XXX = ±.005 [0.13]		1/32 1/16 1/8 1/4 1/2		Website: www.Transsector.com		SCALE		NONE	
CABLE LENGTH TOLERANCES:		ANGLES ±°		Phone: 1.800.882.9110 1.208.635.6400		DESCRIPTION			
±12 [305] = ±1 [25] / -0 ±12 [305] ≤ 60 [1524] = ±2 [51] / -0 ±60 [1524] ≤ 120 [3048] = ±4 [102] / -0 ±120 [3048] ≤ 300 [7620] = ±8% / -0						LV FUSE, 63A, FAST ACTING, CURRENT LIMITING, FLAT BOLT CONNECTION			
ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE UNDIMENSIONED NON-CRITICAL FEATURES MAY VARY		COLORS MAY VARY		SIZE		CAGE CODE		DRAWN BY	
A		A		30992		AKRESOWSKI		ITEM NO.	
FACP-ACDC-63-FB		REV		A					