


REVISION

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	09/20/2024	HBAKKE	GUTTADAURO

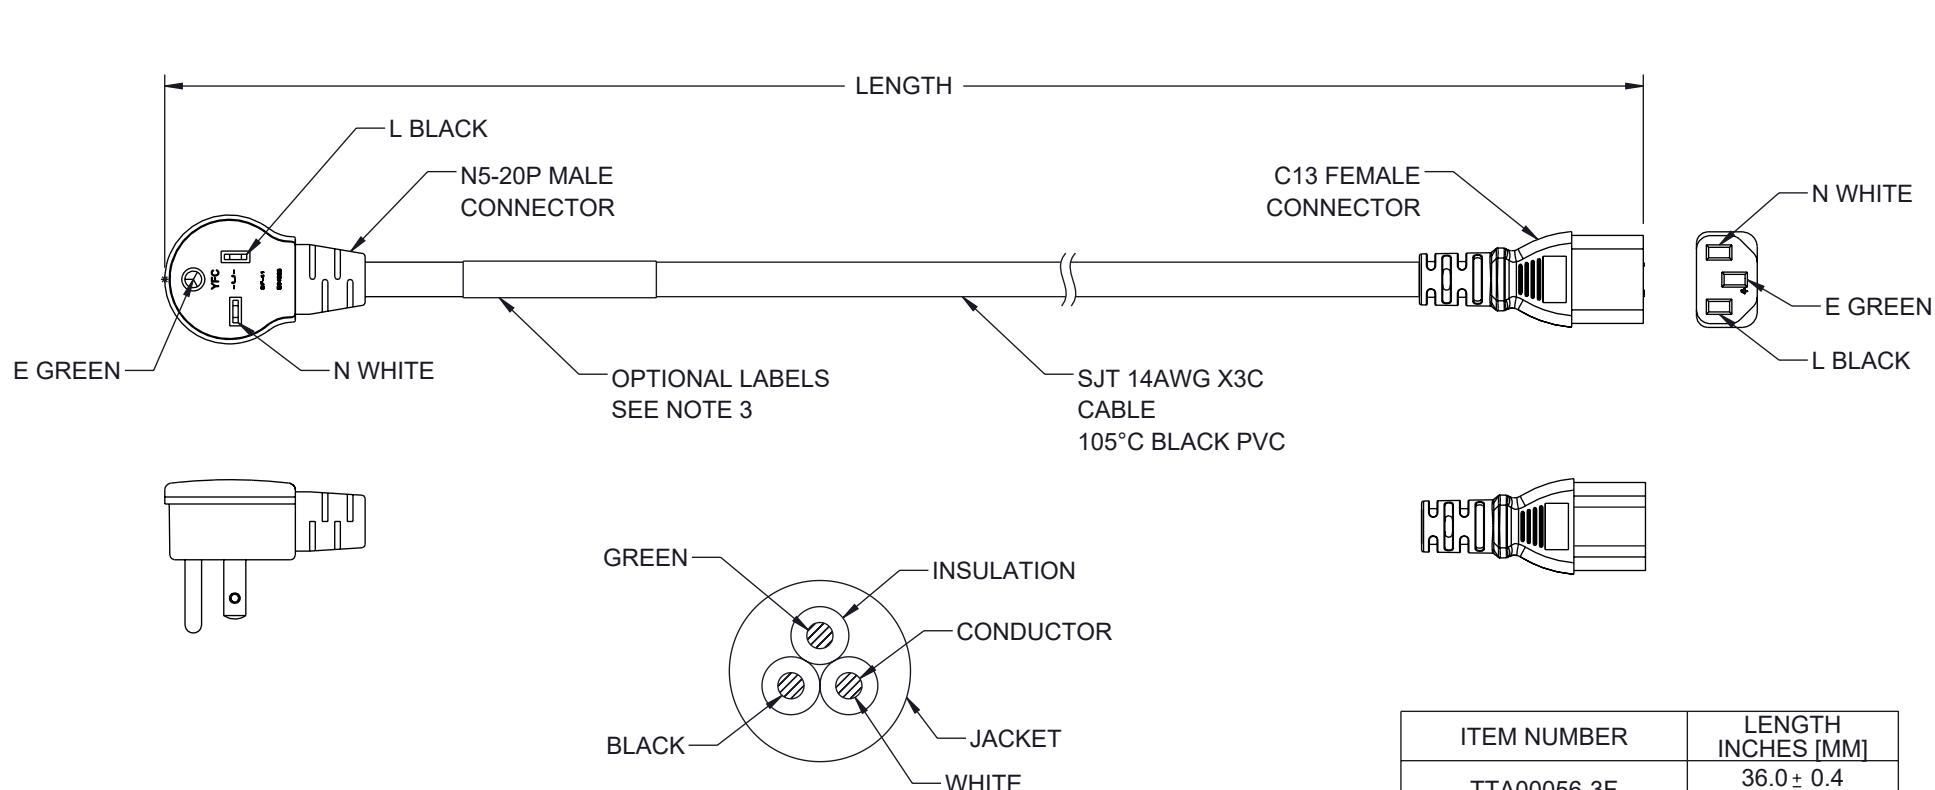

NOTES:

1. VOLTAGE RATING:
DIELECTRIC VOLTAGE WITHSTAND TEST: 1500V / 1sec
CONDUCTOR RESISTANCE: $\leq 8.88\Omega$ / 1000m
VOLTAGE RATING: AC 300V
2. CABLE MARKING :
(UL) E135710-F5 SJT 3X14AWG 105°C 300V VW-1
CSA LL95737 SJT 3X2.08mm² (14AWG) FT2 YFC-BONEAGLE
3. OPTIONAL LABELS:
OPTIONAL LABEL(S) MAY INCLUDE
UL, CURRENT AND/OR WARNING
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.
5. ALL DIMENSIONS FOR REFERENCE ONLY.

REGULATORY COMPLIANCE:
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
 $X = \pm 0.2 [5]$ FRACTIONS
 $XX = \pm 0.02 [0.5]$ $\pm 1/32$
 $XXX = \pm .005 [0.13]$ ANGLES $\pm 1^\circ$

CABLE LENGTH TOLERANCES:
 $\leq 12 [305] = \pm 1 [25] / -0$
 $> 12 [305] \leq 60 [1524] = \pm 2 [51] / -0$
 $> 60 [1524] \leq 120 [3048] = \pm 4 [102] / -0$
 $> 120 [3048] \leq 300 [7620] = \pm 6 [152] / -0$
 $> 300 [7620] = \pm 5\% / -0$

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE
UN-DIMENSIONED/NON-CRITICAL FEATURES
MAY VARY IN SIZE AND LOCATION
COLORS MAY VARY

 **TRANSTECTOR**
an INFINITE® brand

Website: www.Transtector.com
Phone: 1.800.882.9110 | 1.208.635.6400



INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5

SCALE
NONE

1 OF 1

DESCRIPTION

N5-20P - C13 POWER CORD, 15A,125V

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	30992	HBAKKE	TTA00056	A