

6

5

4


3

2

1

## REVISION

| ZONE | REV | DESCRIPTION     | DATE       | CHANGED BY | APPROVED   |
|------|-----|-----------------|------------|------------|------------|
|      | A   | INITIAL RELEASE | 09/20/2024 | HBAKKE     | GUTTADAURO |

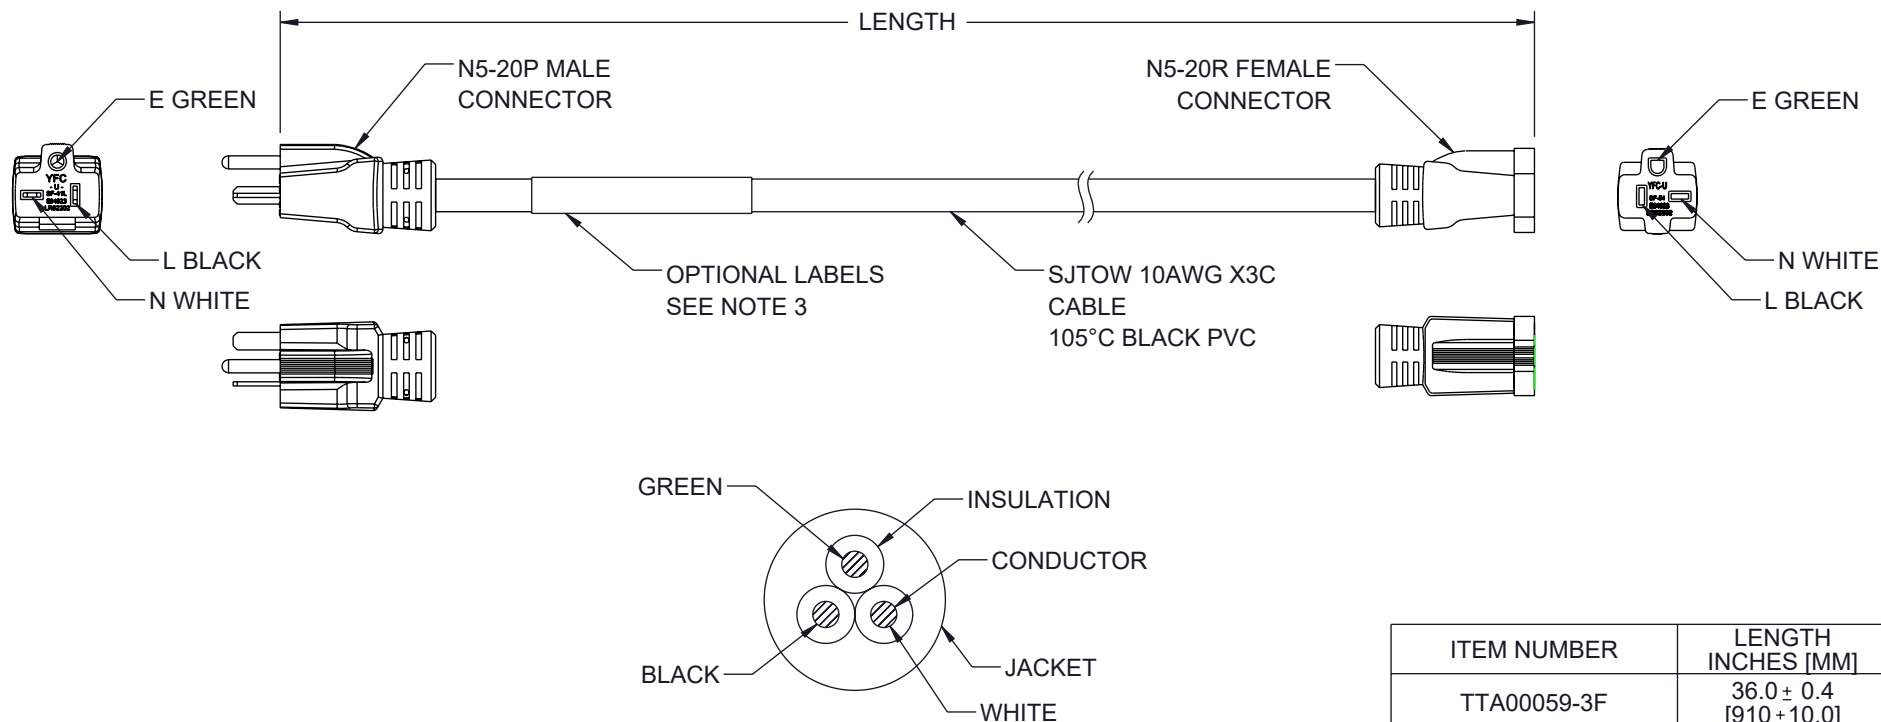

## NOTES:

- VOLTAGE RATING:  
DIELECTRIC VOLTAGE WITHSTAND TEST: 1500V / 1sec  
CONDUCTOR RESISTANCE:  $\leq 3.51\Omega / 1000m$   
VOLTAGE RATING: AC 300V
- CABLE MARKING :  
(UL) E135710-F5 SJTOW 3X10AWG 105°C 300V VW-1 WATER RESISTANT  
C(UL) SJTOW 3X5.26mm<sup>2</sup> (10AWG) 105°C 300V FT2
- OPTIONAL LABELS:  
OPTIONAL LABEL(S) MAY INCLUDE  
UL, CURRENT AND/OR WARNING
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.
- ALL DIMENSIONS FOR REFERENCE ONLY.

## REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:  
X =  $\pm 2$  [5]      FRACTIONS  
XX =  $\pm 0.02$  [0.5]       $\pm 1/32$   
XXX =  $\pm 0.005$  [0.13]      ANGLES  $\pm 1^\circ$

CABLE LENGTH TOLERANCES:  
 $\leq 12$  [305] =  $\pm 1$  [25] / -0  
 $>12$  [305]  $\leq 60$  [1524] =  $\pm 2$  [51] / -0  
 $>60$  [1524]  $\leq 120$  [3048] =  $\pm 4$  [102] / -0  
 $>120$  [3048]  $\leq 300$  [7620] =  $\pm 6$  [152] / -0  
 $>300$  [7620] =  $\pm 5\%$  / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY  
AND SUBJECT TO CHANGE WITHOUT NOTICE.  
UN-DIMENSIONED/NON-CRITICAL FEATURES  
MAY VARY IN SIZE AND LOCATION  
COLORS MAY VARY



an INFINIT@ brand

Website: [www.Transtector.com](http://www.Transtector.com)  
Phone: 1.800.882.9110 | 1.208.635.6400

INTERPRET ALL DIMENSIONS AND  
TOLERANCES PER ASME Y14.5

|       |        |
|-------|--------|
| SCALE | SHEET  |
| NONE  | 1 OF 1 |

## DESCRIPTION

N5-20P - N5-20R POWER CORD, 20A, 125V

| SIZE | CAGE CODE | DRAWN BY | ITEM NO. | REV |
|------|-----------|----------|----------|-----|
| A    | 30992     | HBAKKE   | TTA00059 | A   |

6

5

4

3

2

1