

6

5

4


3

2

1

REVISION

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	09/20/2024	HBAKKE	GUTTADAURO

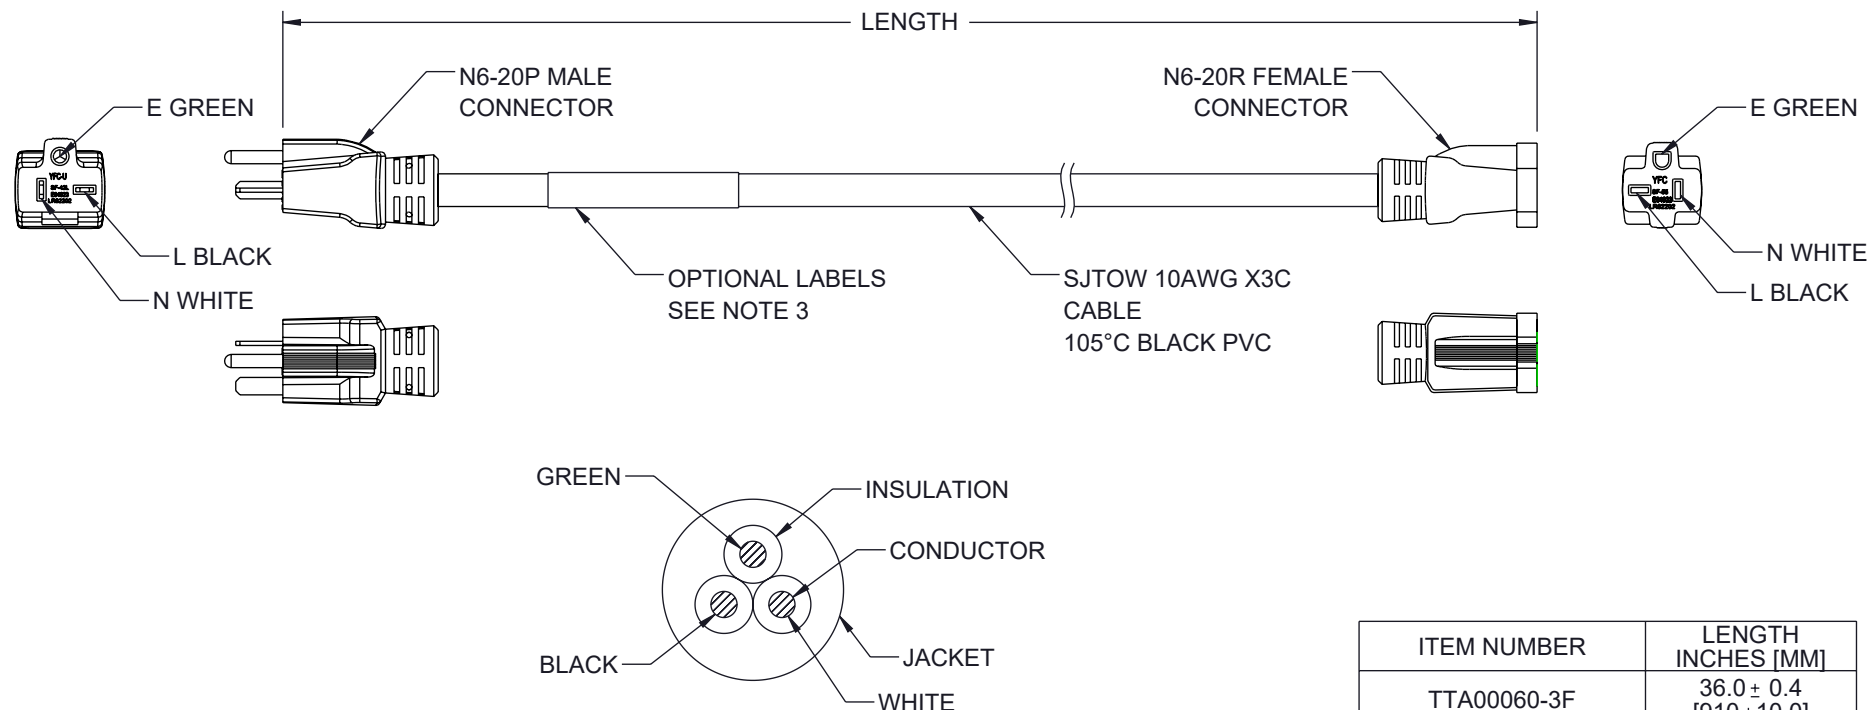

NOTES:

- VOLTAGE RATING:
DIELECTRIC VOLTAGE WITHSTAND TEST: 1500V / 1sec
CONDUCTOR RESISTANCE: $\leq 3.51\Omega / 1000m$
VOLTAGE RATING: AC 300V
- CABLE MARKING :
(UL) E135710-F5 SJTOW 3X10AWG 105°C 300V VW-1 WATER RESISTANT
C(UL) SJTOW 3X5.26mm² (10AWG) 105°C 300V FT2
- OPTIONAL LABELS:
OPTIONAL LABEL(S) MAY INCLUDE
UL, CURRENT AND/OR WARNING
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.
- ALL DIMENSIONS FOR REFERENCE ONLY.

REGULATORY COMPLIANCE:
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

ITEM NUMBER	LENGTH INCHES [MM]
TTA00060-3F	36.0 $\pm$ 0.4 [910 $\pm$ 10.0]
TTA00060-6F	72.0 $\pm$ 0.8 [1830 $\pm$ 20.0]
TTA00060-10F	120.0 $\pm$ 1.2 [3050 $\pm$ 30.0]
TTA00060-15F	180.0 $\pm$ 1.6 [4570 $\pm$ 40.0]
TTA00060-25F	300.0 $\pm$ 2.0 [7620 $\pm$ 50.0]

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
X = ± 2 [5] FRACTIONS
.XX = ± 0.02 [0.5] $\pm 1/32$
.XXX = ± 0.005 [0.13] ANGLES $\pm 1^\circ$

CABLE LENGTH TOLERANCES:
 ≤ 12 [305] = ± 1 [25] / -0
 >12 [305] ≤ 60 [1524] = ± 2 [51] / -0
 >60 [1524] ≤ 120 [3048] = ± 4 [102] / -0
 >120 [3048] ≤ 300 [7620] = ± 6 [152] / -0
 >300 [7620] = $\pm 5\%$ / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE.
UN-DIMENSIONED/NON-CRITICAL FEATURES
MAY VARY IN SIZE AND LOCATION
COLORS MAY VARY



an INFINIT[®] brand

Website: www.Transtector.com
Phone: 1.800.882.9110 | 1.208.635.6400



INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5

SCALE NONE SHEET 1 OF 1

DESCRIPTION
N6-20P - N6-20R POWER CORD, 20A, 250V

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	30992	HBAKKE	TTA00060	A

6

5

4

3

2

1