


ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	09/20/2024	HBAKKE	GUTTADAURO

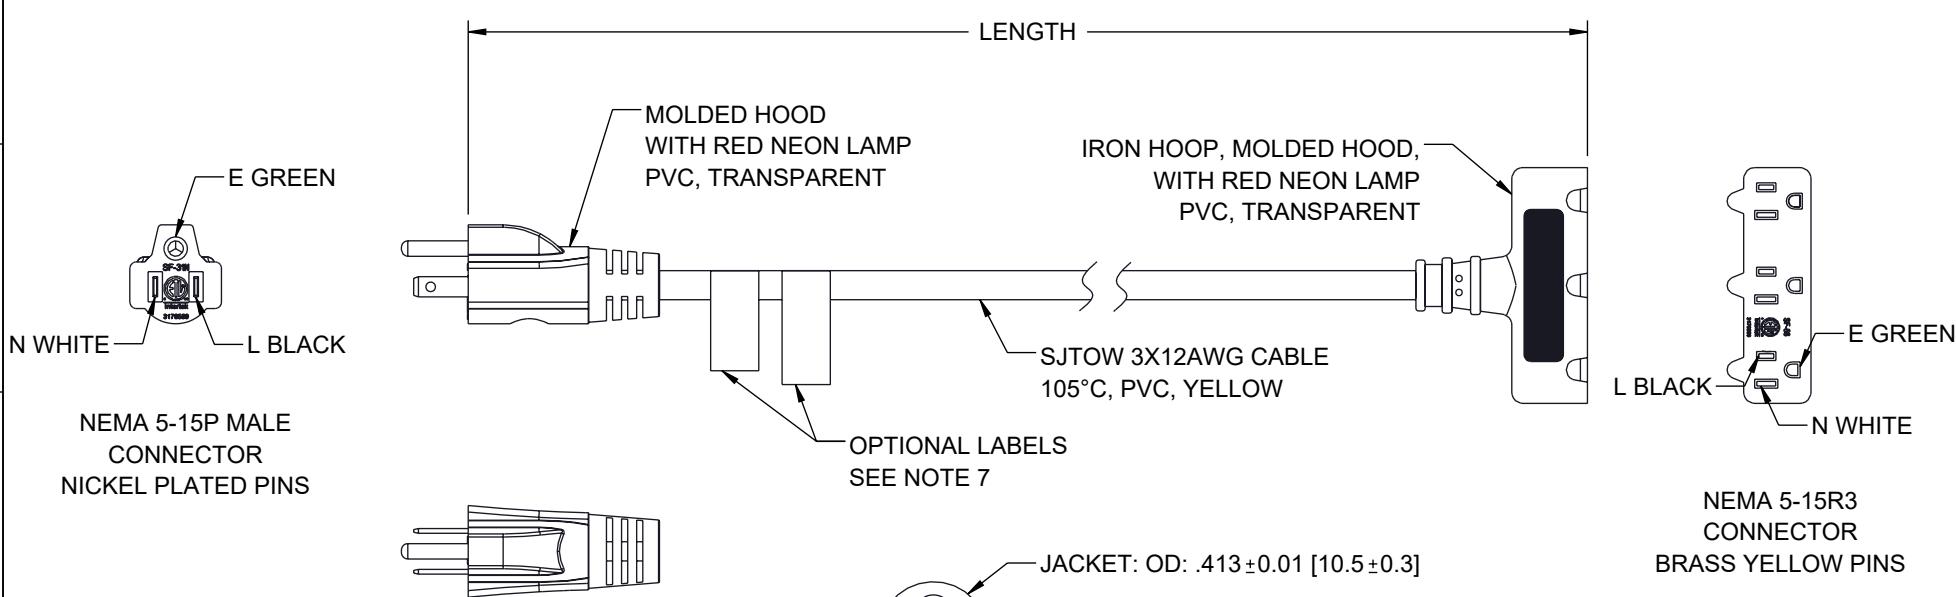

NOTES:

1. DIELECTRIC VOLTAGE WITHSTAND TEST: 1500V / 1 SEC.
2. CONDUCTOR RESISTANCE: 5.69Ω/1000M AT 20°C.
3. CABLE VOLTAGE RATING: AC 300V AT 20°C.
4. CABLE ASSEMBLY RATED FOR 125V/15A.
5. CABLE MARKING : (ETL) US 3176559 SJTOW 3X12AWG 105°C -50°C 300V VW-1 C(ETL) SJTOW 3X3.31mm2 (12AWG) FT2 / (ETL) US 5019033 SJTOW 3X12AWG 105°C -50°C 300V VW-1 C(ETL) SJTOW 3X3.31mm2 (12AWG) FT2.
6. RED NEON LAMP WARNING:
BLACK - RESISTANCE PIN;
WHITE - NO RESISTANCE PIN.
7. OPTIONAL LABELS MAY INCLUDE UL, CURRENT AND/OR WARNING.
8. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
9. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
X = ±.2 [5]
XX = ±.02 [0.5]
XXX = ±.005 [0.13]

FRACTIONS
± 1/32
ANGLES ± 1°

CABLE LENGTH TOLERANCES:
≤12 [305] = ±1 [25] / -0
≥12 [305] ≤ 60 [1524] = ±2 [51] / -0
≥60 [1524] ≤ 120 [3048] = ±4 [102] / -0
≥120 [3048] ≤ 300 [7620] = ±6 [152] / -0
≥300 [7620] = ±5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE
UN-DIMENSIONED/NON-CRITICAL FEATURES
MAY VARY IN SIZE AND LOCATION
COLORS MAY VARY

TRANSTECTOR
an INFINITE® brand

Website: www.Transtector.com
Phone: 1.800.882.9110 | 1.208.635.6400

INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5

SCALE
NONE

1 OF 1

DESCRIPTION

N5-15P - 3N5-15R, SJTOW, YEL, LED

ITEM NO.	SIZE	CAGE CODE	DRAWN BY	REV
TTA00064	A	30992	HBAKKE	A