

REVISION

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	09/20/2024	HBAKKE	GUTTADAURO

F

F

E

E

D

D

C


C

B



B

A


A



NEMA 5/15P
HOSPITAL GRADE
BLACK

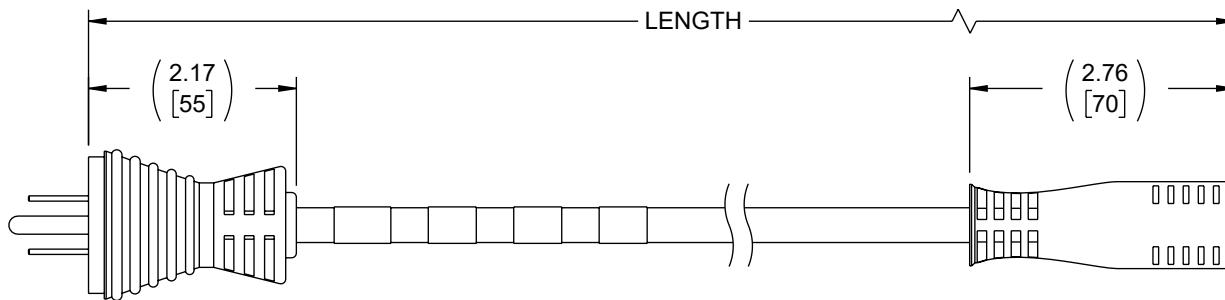

NEMA 5/15R
BLACK

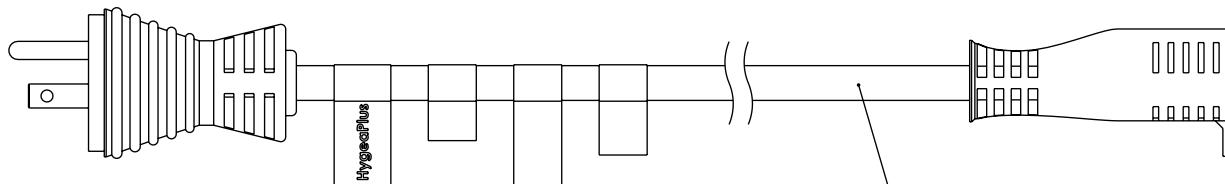

ANTI-MICROBIAL SJTOW3X14AWG
105°C, BLACK

ITEM NUMBER	LENGTH, FT [mm]	TOLERANCE
TTA00068-3F	3.0 [914.4]	± .79 [20.1]
TTA00068-6F	6.0 [1828.8]	± .79 [20.1]
TTA00068-10F	10.0 [3048]	± .79 [20.1]
TTA00068-15F	15.0 [4572]	± .79 [20.1]

NOTES:

UL FILE: E234956.

RATING: 15A

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION).

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
 $X = \pm .2 [5]$ FRACTIONS
 $XX = \pm .02 [0.5]$ $\pm 1/32$
 $XXX = \pm .005 [0.13]$ ANGLES $\pm 1^\circ$

CABLE LENGTH TOLERANCES:
 $\le 12 [305] = \pm 1 [25] / -0$
 $> 12 [305] \le 60 [1524] = \pm 2 [51] / -0$
 $> 60 [1524] \le 120 [3048] = \pm 4 [102] / -0$
 $> 120 [3048] \le 300 [7620] = \pm 6 [152] / -0$
 $> 300 [7620] = \pm 5\% / -0$

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE
UN-DIMENSIONED/NON-CRITICAL FEATURES
MAY VARY IN SIZE AND LOCATION
COLORS MAY VARY

 **TRANSTECTOR**
an INFINITE® brand

Website: www.Transtector.com
Phone: 1.800.882.9110 | 1.208.635.6400

INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5
SCALE SHEET
NONE 1 OF 1

DESCRIPTION
HG N5-15P TO N5-15R, ANTIMICROBE JKT, 15 A

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	30992	HBAKKE	TTA00068	A