
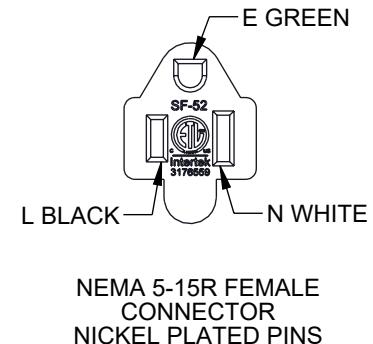
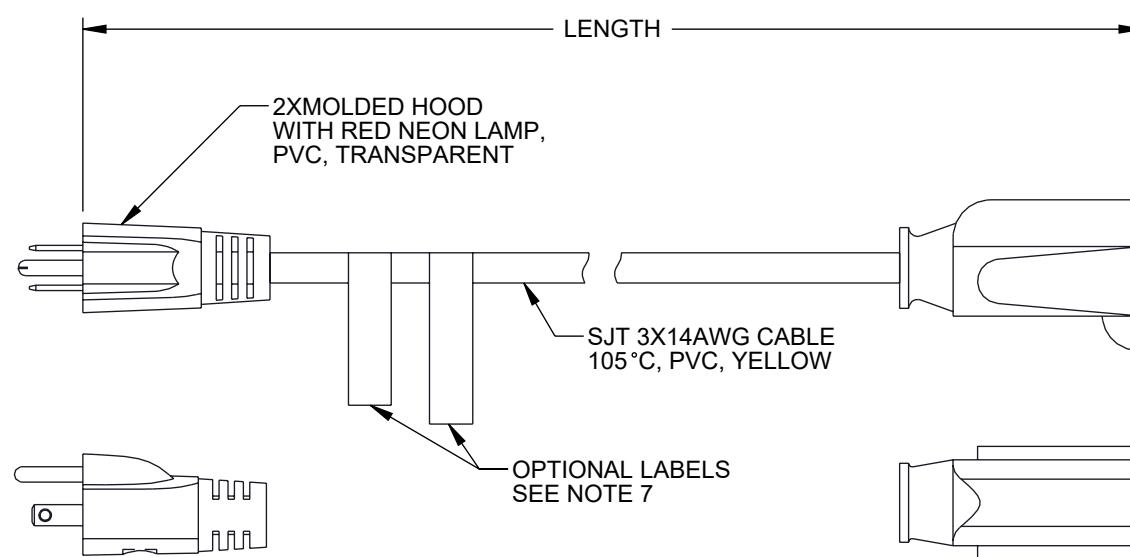


| ZONE | REV | DESCRIPTION | DATE | CHANGED BY | APPROVED |
|------|-----|-----------------|------------|------------|----------|
| | A | INITIAL RELEASE | 05/05/2025 | AKRESOWSKI | DGUST |

F

F

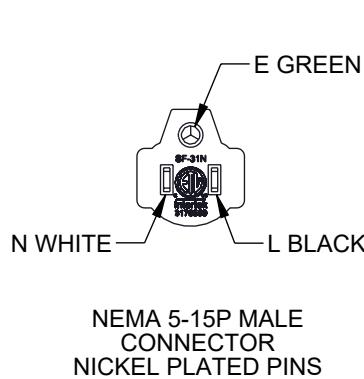


NOTES:

1. DIELECTRIC VOLTAGE WITHSTAND TEST: 1500V / 1 SEC.
2. CONDUCTOR RESISTANCE: 9.05Ω/1000M AT 20°C.
3. CABLE VOLTAGE RATING: AC 300V AT 20°C.
4. CABLE ASSEMBLY RATED FOR 125V/15A.
5. CABLE MARKING : (ETL) US 3176559 SJT 3X14AWG 105°C 300V VW-1 C(ETL) SJT 3X2.08mm² (14AWG) FT2. / (ETL) US 5019033 SJT 3X14AWG 105°C 300V VW-1 C(ETL) SJT 3X2.08mm² (14AWG) FT2.
6. RED NEON LAMP WARNING:
BLACK - RESISTANCE PIN;
WHITE - NO RESISTANCE PIN.
7. OPTIONAL LABELS MAY INCLUDE UL, CURRENT AND/OR WARNING.
8. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
9. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

REGULATORY COMPLIANCE:
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

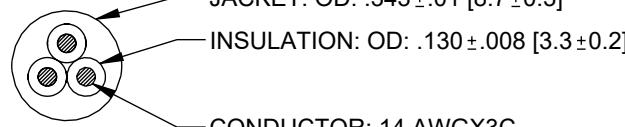

| ITEM NO | LENGTH | |
|---------------|--------|------|
| | METERS | FEET |
| TTA00080-100F | 30.48 | 100 |

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERSTOLERANCES:
X = ±.2 [5]
XX = ±.02 [0.5]
XXX = ±.005 [0.13]FRACTIONS
± 1/32
ANGLES ± 1°
CABLE LENGTH TOLERANCES:
≤12 [305] = ±1 [25] / -0
>12 [305] ≤ 60 [1524] = ±2 [51] / -0
>60 [1524] ≤ 120 [3048] = ±4 [102] / -0
>120 [3048] ≤ 300 [7620] = ±6 [152] / -0
>300 [7620] = ±5% / -0ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE
UN-DIMENSIONED/NON-CRITICAL FEATURES
MAY VARY IN SIZE AND LOCATION
COLORS MAY VARY

TRANSTECTOR
an INFINITE® brand
Website: www.Transtector.com
Phone: 1.800.882.9110 | 1.208.635.6400

INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5
SCALE
NONE
SHEET
1 OF 1DESCRIPTION
POWER CABLE ASSY, NEMA 5-15P LED POWER INDICATOR TO
NEMA 5-15R LED GROUND INDICATOR, SJT 14AWG X 3C 105°C

| SIZE | CAGE CODE | DRAWN BY | ITEM NO. | REV |
|------|-----------|------------|----------|-----|
| A | 30992 | AKRESOWSKI | TTA00080 | A |