


Installation Instructions

RMP-CCTV16

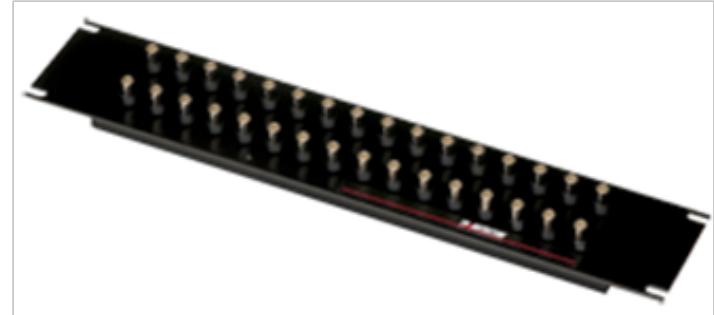

an **INFINIT**E** company**

Thank you for your recent purchase of our surge protection solution. Your satisfaction with our product and service is important to us. If you have any questions, comments or concerns, please contact us at 800.882.9110 or visit our website at www.transtector.com. We look forward to continuing to serve your protection needs.

1. IMPORTANT SAFETY INSTRUCTIONS
2. Read and understand all instructions before installing this product.
Save these instructions for future reference.

Warning

Installation Instructions

RMP-CCTV16

1. This product is intended for indoor use only on video circuits with operating voltages not to exceed 2 Vpp.
2. Mounting the RMP-CCTV16: Mount the device in a standard 19" equipment rack as close to the equipment to be protected as possible using the appropriate hardware for the rack.
3. Wiring the RMP-CCTV16
 - 3.1 Connect the ground lug on the rear of the device to a properly grounded location on the equipment rack. The lug will accept 14-8 AWG wire. Suppressor must be grounded for proper operation!
 - 3.2 Connect an incoming CCTV signal line to an input BNC connector at the top of the patch panel (IN).
 - 3.3 Connect the equipment to be protected to the corresponding output BNC connector at the bottom of the patch panel (OUT). Repeat this procedure for all incoming CCTV signal lines.

