

14x12x06 Polycarbonate Weatherproof Outdoor IP24 NEMA 3R
Enclosure, 120-240 VAC Universal Outlet MNT PLT Vented Lid DKG Y

TEPC141206-E0V



Features

- High-Impact, UV Resistant Polycarbonate (Dark Gray)
- Stainless steel latches with padlock eye
- NEMA Type 3R / IP24 rated
- Fully gasketed vented lid with filters & user installed wall mounting brackets
- Features aluminum mounting plate with universal duplex socket for 120-240 VAC power

Applications

- Remote Wireless LAN WiFi equipment installations
- Indoor and outdoor installations
- Rapid Deployment Installations
- Corrosive environments & hotspot applications
- Protection of equipment from theft or damage

Description

The box is a rugged weatherproof enclosure that is ideal for both indoor and outdoor applications. Constructed from High-Impact, UV Resistant Polycarbonate material that provides superior durability to impacts and ease of modification while maintaining minimum weight. It is well suited for high temperature or corrosive environments. The lid includes two vents with installed rain guards and filters. The included wall mount brackets come uninstalled and bagged with their hardware inside of the enclosure. Once the brackets are installed the enclosure can be mounted directly to any flat wall surface provided proper screws are used into secure studs. The brackets, once installed, also allow you to use our TEF-PMT pole mount kits. The lid features a non-metallic hinge system that allows for quick removal & can be reattached just as quickly without the need for any tools. The enclosure comes with a pair of stainless-steel latches with padlock eyes allowing you to secure the enclosure from tampering. The enclosure comes in a Dark Gray (Pantone 422C)

Mounting Plate

The aluminum mounting plate included with the TEPC141206-E0V features two 120-240 VAC Universal Euro outlets (contained in one duplex socket) and a terminal block for easy hook up to externally provided line power. The enclosure also features holes for two N-Bulkhead Lightning Protectors or Connectors, a grounding lug and cable conduit connector.

The TEF-PMT series of pole mounting kits allow the populated enclosure to be securely mounted to a variety of different size poles.

Compatible versions include TEF-PMT13, TEF-PMT16, TEF-PMT28, TEF-PMT29, TEF-PMT30, & TEF-PMT33

Size

Outer Height	14.6 in	[370.84 mm]
Outer Width	12.6 in	[320.04 mm]
Outer Depth	7.4 in	[187.96 mm]
Inner Height	13.7 in	[347.98 mm]
Inner Width	11.7 in	[297.18 mm]
Inner Depth	5.9 in	[149.86 mm]
Weight	8.85 lbs	[4.01 kg]
Enclosure Material	Polycarbonate	

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[14x12x06 Polycarbonate Weatherproof Outdoor IP24 NEMA 3R Enclosure, 120-240 VAC Universal Outlet MNT PLT Vented Lid DKG Y TEPC141206-E0V](#)

14x12x06 Polycarbonate Weatherproof Outdoor IP24 NEMA 3R
Enclosure, 120-240 VAC Universal Outlet MNT PLT Vented Lid DKG Y

TEPC141206-E0V



Environmental Specifications

Temperature Rating	-40° to 265° F [-40° to 129° C]
NEMA Rating	3R
Ingress Protection (IP) Rating	IP24

Compliance Certifications

UL Listed	No
-----------	----

Transtector Systems specializes in protection of highly sensitive, low voltage equipment through its patented, non-degrading silicon diode technology and custom filters. Our power quality expertise translates into a diverse product offering including AC, DC, and signal applications as well as integrated cabinets, power distribution panels and EMP hardened devices.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [14x12x06 Polycarbonate Weatherproof Outdoor IP24 NEMA 3R Enclosure, 120-240 VAC Universal Outlet MNT PLT Vented Lid DKG Y TEPC141206-E0V](https://www.transtector.com/14x12x06-polycarbonate-weatherproof-outdoor-ip24-nema-3r-tepc141206-e0v-p.aspx)

URL: <https://www.transtector.com/14x12x06-polycarbonate-weatherproof-outdoor-ip24-nema-3r-tepc141206-e0v-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Transtector reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Transtector does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Transtector does not assume any liability arising out of the use of any part or documentation.

14x12x06 Polycarbonate Weatherproof Outdoor IP24 NEMA 3R Enclosure,
120-240 VAC Universal Outlet MNT PLT Vented Lid DKG Y

TEPC141206-E0V CAD Drawing

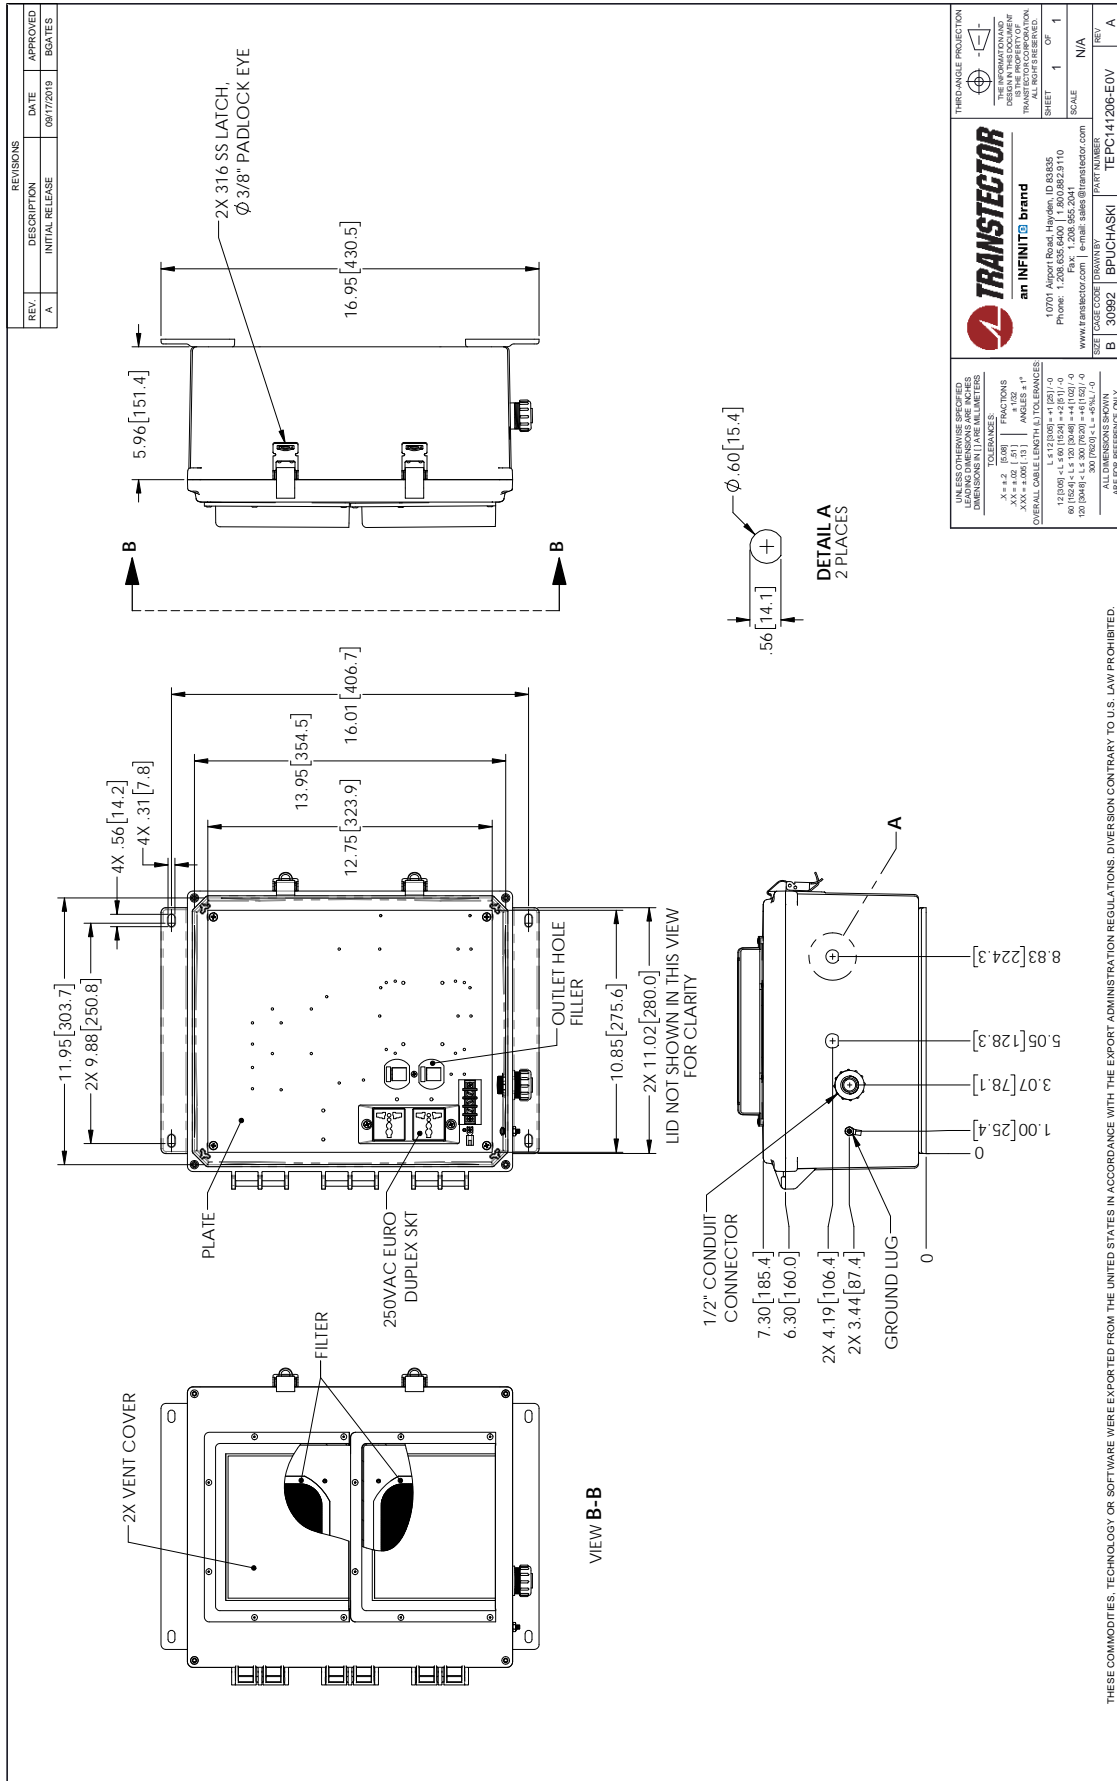

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/17/2019	BGATES

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETERS

DECIMALS: X = 0.1 (25.4) FRACTIONS: X = 1/2 (12.7) ANGLES: 1°

TOLERANCES: X.XX ± 0.001 (0.1) ANGLES ± 1°

OVERALL CABLE LENGTH & TOLERANCES: 10 (254) L ± 12 (305) ± 1 (25.4) -0 60 (1524) L ± 300 (7620) ± 1 (25.4) -0 120 (3048) L ± 300 (7620) ± 1 (25.4) -0 200 (5080) L ± 300 (7620) ± 1 (25.4) -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

THIRD-ANGLE PROJECTION

THE INFORMATION CONTAINED HEREIN IS THE PROPERTY OF TRANSTECTOR. ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

10701 Airport Road, Hayden, ID 83435
Phone: 1-208-635-6400 Fax: 1-208-635-2014
www.transtector.com | e-mail: sales@transtector.com

SIZE CODE: B30W187 PART NUMBER: TEPC141206-E0V

REV: A