

Data Surge Protector SPD TSJ Indoor 6 Port Gigabit  
Ethernet Shielded RJ45 GDT, TBU



**1101-1044**  
**TSJ X6 GbE**

### Features

- Gigabit Ethernet
- RJ-45 Connectivity
- Dedicated Ground Lug
- 6 Protected Ports
- Wall Mount

### Applications

- Gigabit Ethernet Networks
- Telecommunications Base Stations
- WISP/ISP
- IT & Data Centers
- Point-to-Point Links
- Control Lines and Sense Loops
- Oil & Gas

### Description

Data surge protector (also known as SPD or lightning protector) 1101-1044 from Transtector is an indoor style SPD that utilizes state of the art TBU/GDT technology to protect critical equipment in Gigabit Ethernet protocol data networks while remaining transparent to data throughput. This surge protector provides effective protection against electrical transient surges that are generated both by external lightning events and by internal switching events and supports long-term system reliability by absorbing high amounts of transient energy while maintaining a very low clamping voltage. Transtector Data Signal surge protectors are available in stock with same day shipping.

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Connectors		Shielded RJ45		
Compatible Cables		Cat5/5e UTP/STP, Cat6/6A STP		
Data Protocols		Gigabit Ethernet		
Data Rate			1,000	Mb/s
Series Impedance (Data)			9	Ohms
Capacitance (Differential)			4	pF
Capacitance (Common)			4	pF
Vdc Rating (Data)	3.3		11	Vdc

### Surge Protection Specification

Description	Minimum	Typical	Maximum	Units
Surge Protection Technology		GDT, TBU		

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:  
[Data Surge Protector SPD TSJ Indoor 6 Port Gigabit Ethernet Shielded RJ45 GDT, TBU 1101-1044](#)

Data Surge Protector SPD TSJ Indoor 6 Port Gigabit  
Ethernet Shielded RJ45 GDT, TBU



**1101-1044**  
**TSJ X6 GbE**

Protected Pins	[1,2], [3,6], [4,5], [7,8]	
Protection Modes	L-G, L-L	
10/1000 $\mu$ s Surge Current	L-G	500 A
8/20 $\mu$ s Surge Current	L-G	5 kA
Response Time	75	ns

**Mechanical Specifications**

**Size**

Height	5.33 in	[135.38 mm]
Width	6.15 in	[156.21 mm]
Depth	1.2 in	[30.48 mm]
Weight	0.7 lbs	[317.51 g]

**Environmental Specifications**

Operating Temperature	-40 to +85 deg C
Storage Temperature	-40 to +85 deg C

**Installation**

Mount Type	Wall
Installation Hardware	#10 x 5/8" Tapping Steel Screw
Grounding	1/4-20 Stud

**Compliance Certifications**

RoHS Compliant	Yes
----------------	-----

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:  
[Data Surge Protector SPD TSJ Indoor 6 Port Gigabit Ethernet Shielded RJ45 GDT, TBU 1101-1044](#)

Data Surge Protector SPD TSJ Indoor 6 Port Gigabit  
Ethernet Shielded RJ45 GDT, TBU



**1101-1044**  
TSJ X6 GbE

---

Transtector Systems specializes in protection of highly sensitive, low voltage equipment through its patented, non-degrading silicon diode technology and custom filters. Our power quality expertise translates into a diverse product offering including AC, DC, and signal applications as well as integrated cabinets, power distribution panels and EMP hardened devices.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Data Surge Protector SPD TSJ Indoor 6 Port Gigabit Ethernet Shielded RJ45 GDT, TBU 1101-1044](https://www.transtector.com/data-surge-protector-spd-tsj-indoor-6-1101-1044-p.aspx)

URL: <https://www.transtector.com/data-surge-protector-spd-tsj-indoor-6-1101-1044-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Transtector reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Transtector does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Transtector does not assume any liability arising out of the use of any part or documentation.

1101-1044 CAD Drawing

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	1/17/19	DWR

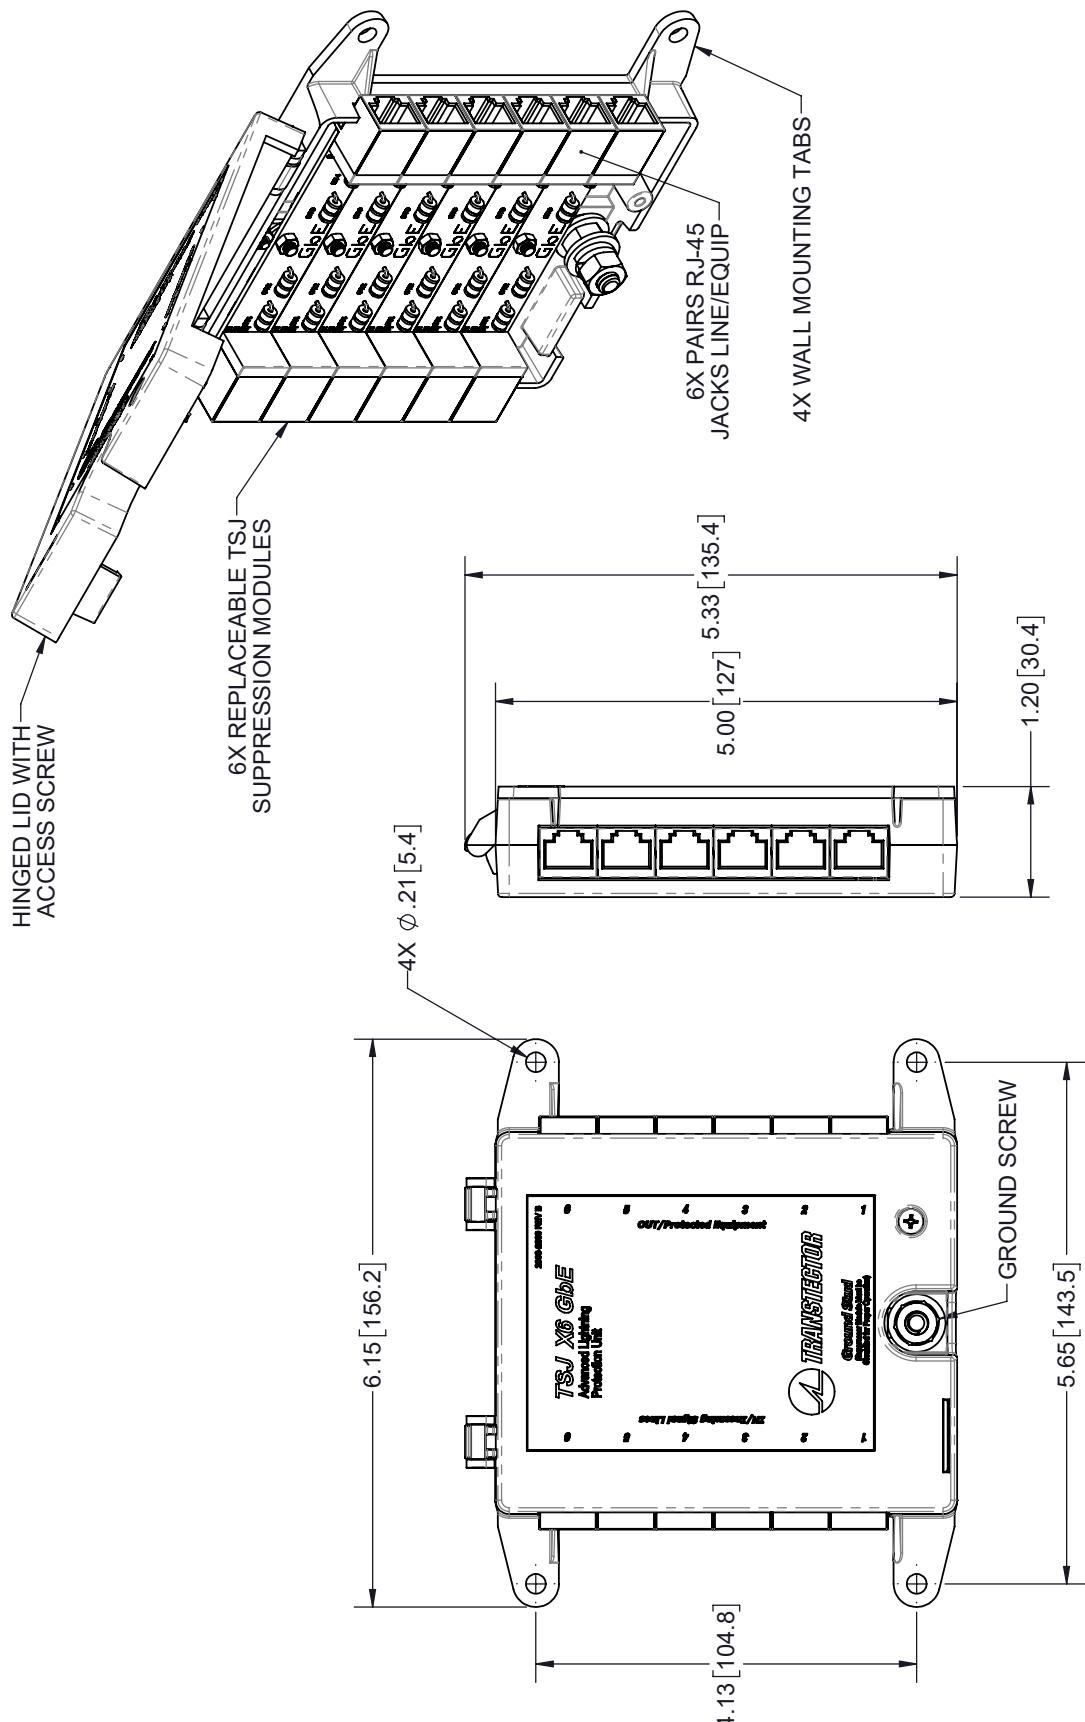

 <h1>TRANSECTOR</h1>		THE INFORMATION AND DESIGN IS THE PROPERTY OF TRANSCTOR CORPORATION. ALL RIGHTS RESERVED.			
		SHEET	1	OF	1
<b>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS IN FEET DIMENSIONS IN 1/8 INCHES LEADING DIMENSIONS IN MILLIMETERS DIMENSIONS IN 1/32 MILLIMETERS</b>		<b>10701 AIRPORT ROAD, HAYDEN, ID. 83835 PHONE: 1-800-635-6400   1-800-882-9110 FAX: 1-800-955-2041</b>			
<b>TOLERANCES</b> $X \pm \epsilon$ : 2 [5.08] $X \pm \epsilon$ : 0.1 [2.5] $XXX \pm \epsilon$ : 0.05 [1.3]		<b>FRACTIONS</b> $\pm 1/32$ <b>ANGLES</b> $\pm 1^\circ$			
<b>ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.</b>		<b>www.transctor.com</b>   e-mail: <a href="mailto:sales@transctor.com">sales@transctor.com</a>			
SIZE	CAGE	DRAWN BY	PART NUMBER	REV	A
A	30992	HMB	1101-1044		
<b>THIRD-ANGLE PROJECTION</b> 					

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.