

6

5

4


3

2

1

REVISION

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	05/05/2025	AKRESOWSKI	DGUST

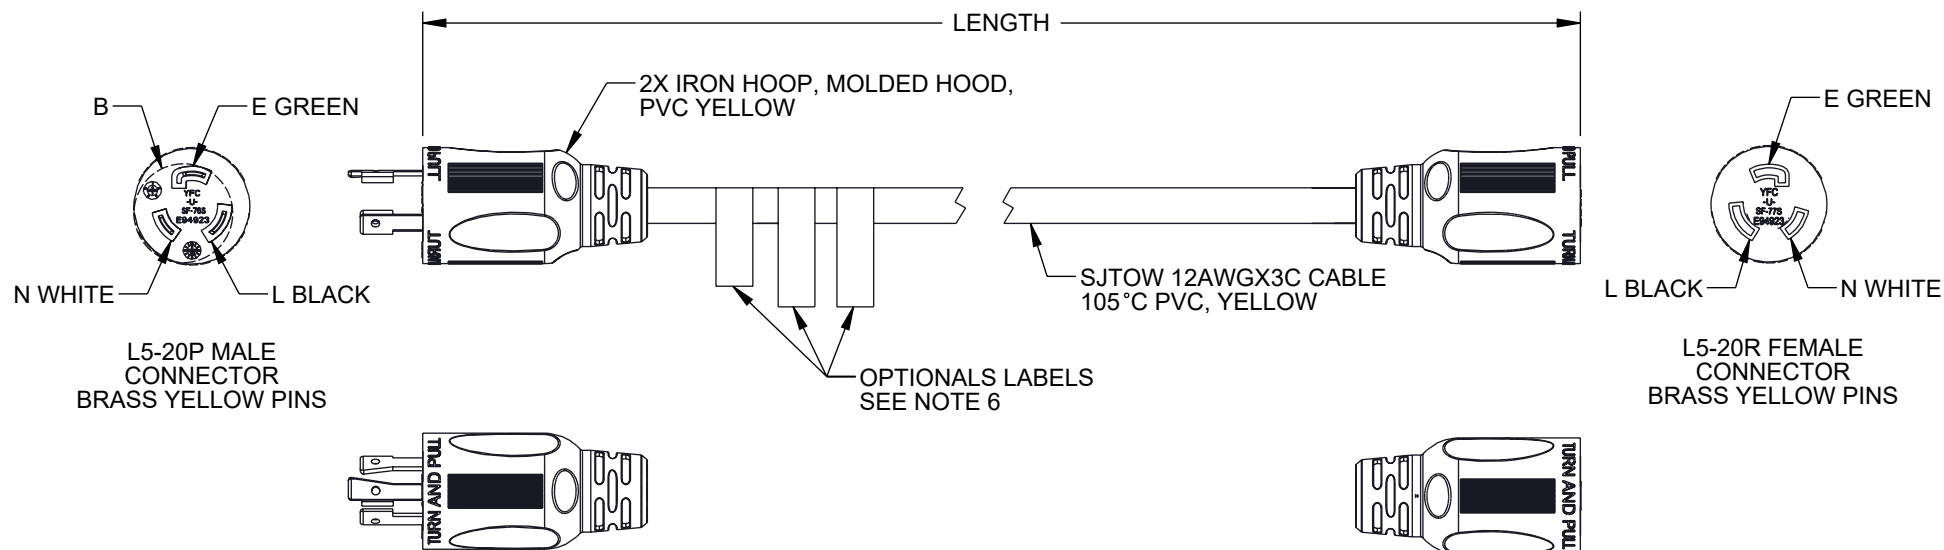

NOTES:

1. DIELECTRIC VOLTAGE WITHSTAND TEST: 1500V / 1 SEC.
2. CONDUCTOR RESISTANCE: 5.69Ω/1000M AT 20°C.
3. CABLE VOLTAGE RATING: AC 300V AT 20°C.
4. CABLE ASSEMBLY RATED FOR 125V/20A.
5. CABLE MARKING: WH: (UL) E135710-F5 SJTOW 3X12AWG 105°C -50°C 300V VW-1 WATER RESISTANT C(UL) SJTOW 3X3.31mm² (12AWG) 105°C -50°C FT2. PH: (UL) E135710-F7 SJTOW 3X12AWG 105°C -50°C 300V VW-1 WATER RESISTANT C(UL) SJTOW 3X3.31mm² (12AWG) 105°C -50°C FT2.
6. OPTIONAL LABELS MAY INCLUDE UL, CURRENT AND/OR WARNING.
7. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
8. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

REGULATORY COMPLIANCE:
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

6

5

4

3

2

1

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS		 TRANSTECTOR® an INFINIT@ brand Website: www.Transtector.com Phone: 1.800.882.9110 1.208.635.6400		 INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
TOLERANCES:		SCALE NONE		SHEET 1 OF 1	
X = ±.2 [5] .XX = ±.02 [0.5] .XXX = ±.005 [0.13]					
CABLE LENGTH TOLERANCES: ≤12 [305] = +1 [25] / -0 >12 [305] ≤ 60 [1524] = +2 [51] / -0 >60 [1524] ≤ 120 [3048] = +4 [102] / -0 >120 [3048] ≤ 300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		DESCRIPTION POWER CABLE ASSY, L5-20P TO L5-20R, SJTOW 12AWG X 3C 105°C			
ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE UN-DIMENSIONED/NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION COLORS MAY VARY		SIZE A	CAGE CODE 30992	DRAWN BY AKRESOWSKI	ITEM NO. TTA00085
					REV A